

**NEW
PRODUCT**



WECO



Easy.
Flexible.
Compact.

SKO SMART SERIES

SINGLE-PHASE SYSTEM

ALL IN ONE


Make your home green with cutting-edge technology for long-term energy independence.

|| WeCo trademark and logo **WECO** are registered by WeCo Srl (Italy)
The LCA cycle is currently underway for the complete system

WECCO

Energy at your fingertips

WeCo Cloud Platform

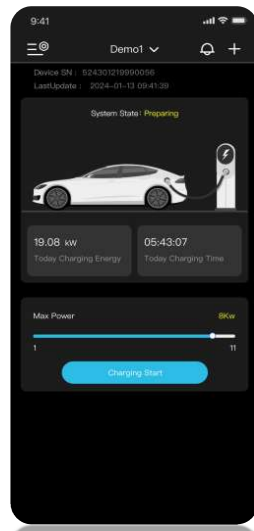

EASY AND INTUITIVE

The wizard allows you to add new devices at any time with just a few clicks. Inverter or EV Charger can be added to the synoptic in one click.

AI MODE maximizes profits from dynamic tariffs

ALL FUNCTION AT YOUR FINGERTIPS

With the NOOR App, the installer has access to all inverter settings even remotely. Technical support from the WeCo team accessible directly from the APP.





CARATTERISTICHE



IP66 CERTIFIED FOR OUTDOOR INSTALLATIONS

Designed to challenge every season, the SMART series is your ally for energy security. With its IP66 rating, it ensures dust tight and water-resistant, ensuring maximum performance in harsh conditions.



PLUG & PLAY

Easy installation, only 20 minutes in two people, no manual configuration and no cable between inverter and batteries, everything is plug and play. Error-proof and final self-check installation method via NooR App using the Commissioning Wizard... even remotely!




INTEGRATED HEATING SYSTEM FOR COLD CLIMATES

State-of-the-art heating system keeps battery cells above minimum temperatures, ensuring consistent performance even in persistently cold conditions.



ADVANCED FIRE SUPPRESSION SYSTEM

Safety always comes first!
Each battery module is equipped with a sophisticated fire suppression system, providing unparalleled security and peace of mind.

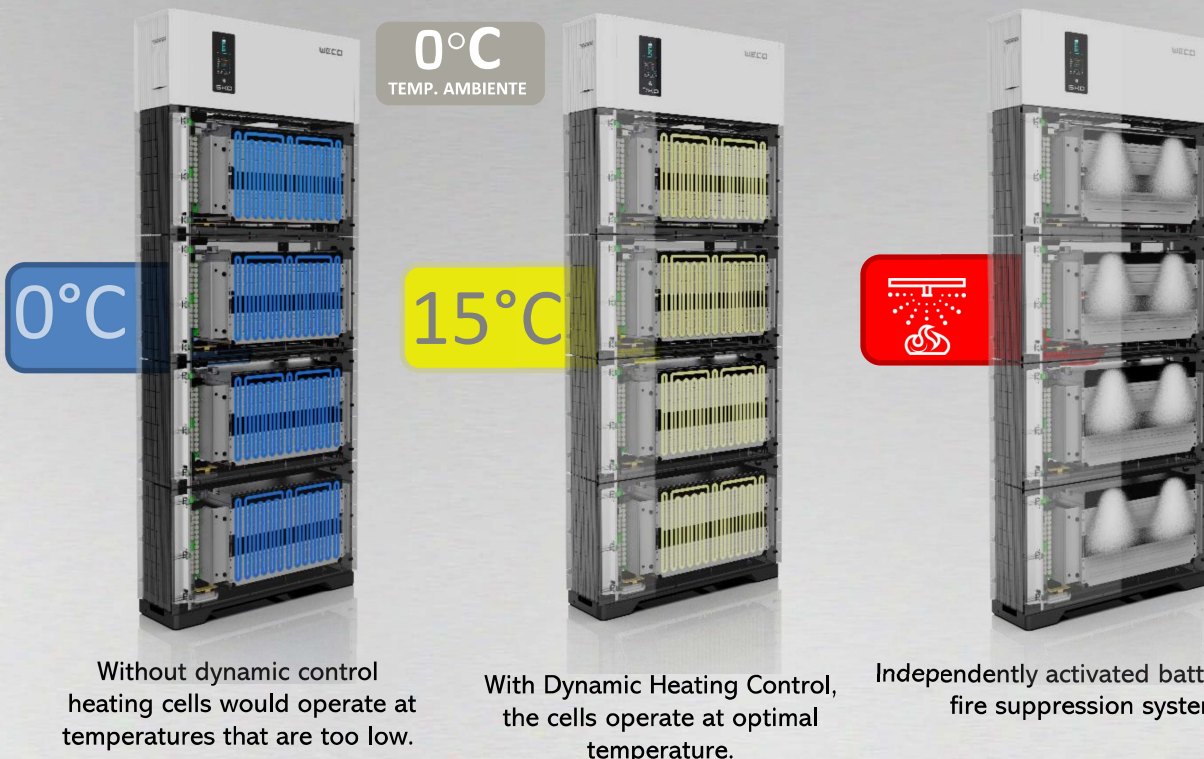



FEATURES




STRUCTURE ANTI-SEISMIC

The battery exhibits exceptional resilience to seismic activity, ensuring uninterrupted power supply and system reliability during earthquakes.



POWER AND MODULAR CAPACITY


Expand effortlessly! Connect up to 4 modules in parallel to form a cluster and connect up to 3 towers for a total of 12 modules. The SMART series offers a flexible, scalable, high-capacity energy storage solution that adapts to your evolving needs.



ALWAYS BALANCED CLUSTER

EASY EXPANDABILITY AT ANY TIME

- Plug and Play expansion with Master controller.
- Up to 12 modules per cluster.
- Add forms at any time.
- Plug & Play Configuration.

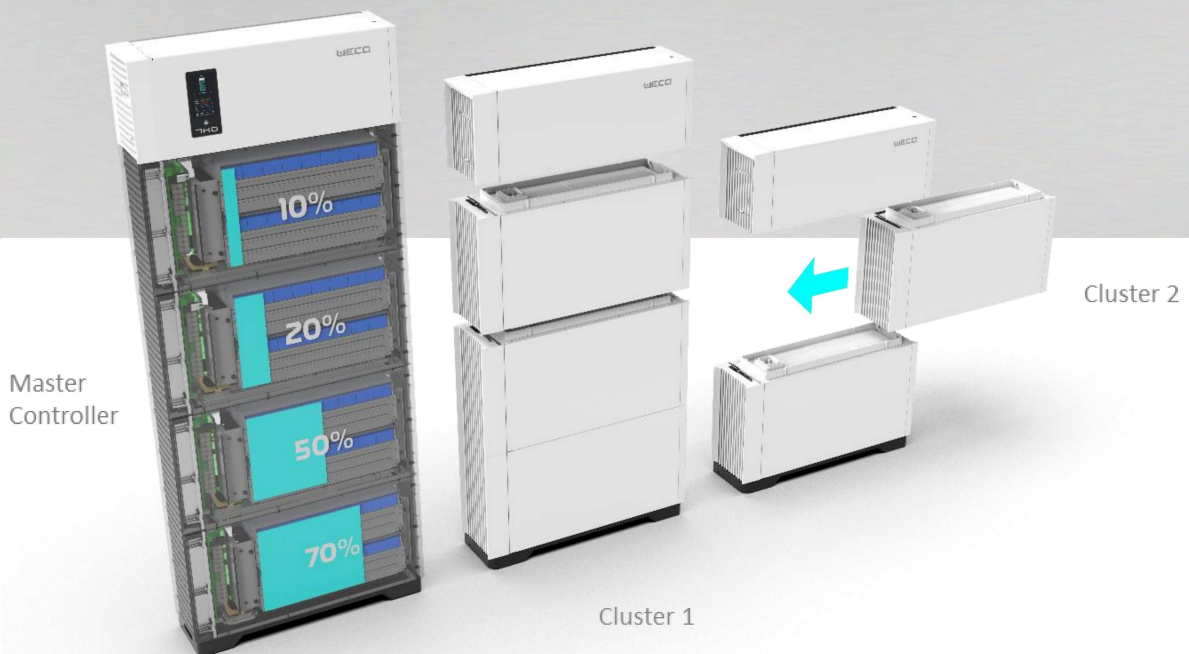



5K0 SMART

SINGLE PHASE INVERTER (EU)

PV oversizing of up to 200% of AC power*

Datasheet

	5K0 SMART EU 3.0K	5K0 SMART EU 3.6K	5K0 SMART EU 4.0K	5K0 SMART EU 4.6K	5K0 SMART EU 5.0K	5K0 SMART EU 6.0K
INVERTER	Model					
	Inverter 230 VAC Single Phase					
BATTERY	Expandability					
	Up to 4 battery modules per inverter, Up to 4 inverters in one system in parallel.					
	Cell Type					
	LiFePO4 (LFP)					
	Capacity					
	100Ah					
	Operating Temperature					
	-15°C + 45°C**					
	Heating System					
	Module-level integrated					
SOLAR	Fire Suppression					
	Module-level integrated					
	Booster Nominal Voltage					
	430V (Booster)					
	Operating voltage range					
	420-450V					
	Single Battery Power					
	2.5kW (picco 3.5kW)					
	Protocol					
	WECCO CAN					
AC INPUT/OUTPUT (ON-GRID)	Maximum Power Input PV Inverter					
	6kW	7.2kW	8kW	9.2kW	10 kW	
	Maximum Voc voltage MPPT channel					
	580 VDC					
	PV Start In					
	125 VDC					
	PV Cut Off					
	80 VDC					
	MPPT Operating Voltage					
	80 VDC – 520 VDC					
AC OUTPUT (OFF-GRID)	MPPT Number					
	2					
	Maximum Current for MPPT					
	16A					
	Short Circuit Current MPPT					
	20A					
	PV Power vs AC Output Ratio					
	2*					
	Inverter AC Voltage					
	230 Vac L/N/PE, Single-Phase					
AC BATTERY OUTPUT (BACK-UP)	Frequency					
	50 / 60 Hz ± 5 Hz					
	Rated Power Output					
	3kW	3.6 kW	4.0kW	4.6 kW	5 kW	6kW
	Rated Current					
	13.0A	15.6 A	17.3A	20.0A	21.7A	26.0A
	Bypass Power					
	6 kW	7.2 kW	8 kW	9.2 kW		
	Bypass Current					
	26.0 A	31.3 A	34.7 A		40.0 A	
GENERAL PARAMETERS	EPS Output Voltage					
	230 VAC L/N/PE, Monofase					
	Frequency					
	50 / 60 Hz ± 5 Hz					
	EPS Output Power					
	3.0 kW	3.6kW	4.0kW	4.6 kW	5kW	6kW
	EPS Output Current					
	13.0 A	15.6A	17.3A	20.0 A	21.7A	26.0A
	EPS Output Voltage					
	230 VAC					
EPS Tension Range						
202.4-253 VAC						
Frequency						
50 / 60 Hz ± 5 Hz						
Power factor						
0.8 (leading)~0.8 (lagging)						
THDi						
< 2% (Rated Power)						
EPS output power if there is only one battery						
2.5 kVA						
EPS output power if two batteries are present						
3 kVA	3.6 kVA	4 kVA	4.6 kVA	5 kVA		
EPS output power if three or four batteries are present						
3 kVA	3.6 kVA	4 kVA	4.6 kVA	5 kVA	6 kVA	
Overload power 10s with one battery						
3.6kW						
Overcharge power 10s with two batteries						
4.5 kVA	5.4 kVA	6 kVA	6.9 kVA	7.2 kVA		
Overcharge power 10s with three-four batteries						
4.5 kVA	5.4 kVA	6 kVA	6.9 kVA	7.2kVA	7.5kVA	
EPS output voltage rating						
230 VAC						
Frequency						
50 / 60 Hz ± 5 Hz						
EPS switching time						
Min 5ms Avg 15ms						
THDi						
< 2% (rated power)						
European efficiency						
97%						
Maximum Efficiency						
98%						
Protection						
IP66						
Noise						
<50 dB @1m						
Inverter Weight / Dimensions mm						
23kg / 640x420x210						
Battery Weight / Dimensions mm						
53 Kg / 630x340x210						
Installation						
Floor/Stack						
Altitude						
9,843 ft / 3,000 m						
Operating Temperature (Ambient)						
-20~50°C/-4~122°F Inverter and/or batteries will reduce power when reached 40°C						
Humidity						
0 - 95% RH (non-condensing)						
Portal and APP						
WeCo NooR APP						
Interface						
APP and LCD						
SECURITY AND COMPLIANCE	Safety					
	Heating system, Fire protection, Dynamic control of charge-discharge power, Module insulation					
Security and network standards						
IEC / EN 62109-1, IEC / EN 62109-2, IEC / EN 62477-1, IEC / EN 62619-1, IEC 60730 Annex H, IEC 60529, VDE 2510-50, UN 38.3, IEC 61000-6-3, IEC / EN 61000-6-1, IEC 61683						
Network Specifications						
NTS 2.1 Type (A), UNE 217001, UNE 217002, RD 244, RD 647, CEI 0-21, VDE-AR-N 4105, DIN VDE V 0124-100, G99 type A, UKCA						
LIMITED WARRANTY	Limited Warranty					
	Extendable up to 10 years					
NOTE	Note*					
	For details, see warranty terms and manuals					
Note**						
Depending on the battery configuration, each battery can provide a maximum output of 2.5 kW						

* The 6kW model supports 10KW of PV at most.

**The temperatures mentioned above are limited to BMS ranges, these values may not be covered by the performance warranty.

We recommend that you contact WeCo for the most up-to-date datasheet, read the warranty and manual before making any purchase decisions.

No part of this document may be copied or reproduced without the written permission of WeCo.

All data is subject to change without notice.

Battery

5K0

&

8K0

NEW

COMING SOON

Specifications

GENERAL PARAMETERS	Battery Cell type	LiFePO4 (LFP) 5K0	LiFePO4 (LFP) 8K0
	Nominal capacity	5,12 kWh	8.0 kWh
	DOD**	Fino al 100%	Fino al 100%
	Voltage rating	430Vdc	430Vdc
	Weight	50kg	65Kg
	Dimensions	669 x 185 x 340 mm	669 x 255 x 340 mm
	Maximum altitude	9,843 ft / 3,000 m	
	BMS Operating Temperature	-20°C~50°C / -4~122°F	
	Storage Temperature	Up to 6 months without charging (see manual for details)	
	Operating humidity	0 - 95% RH (senza condensa)	
Certifications	*UL 9540A, UN 38.3, IEC 62619, IEC 60730, IEC 62040-1		

NOTE

Test conditions: 100% depth of discharge (DoD), 0.5C charge and discharge power at 25°C, at the beginning of service life.


The weight of the battery module may vary between markets, with a tolerance of +3%.

*Certification in progress, more available on request ** See warranty conditions

Energy Optimizer /Booster

Quick Coupling

Snap handle**

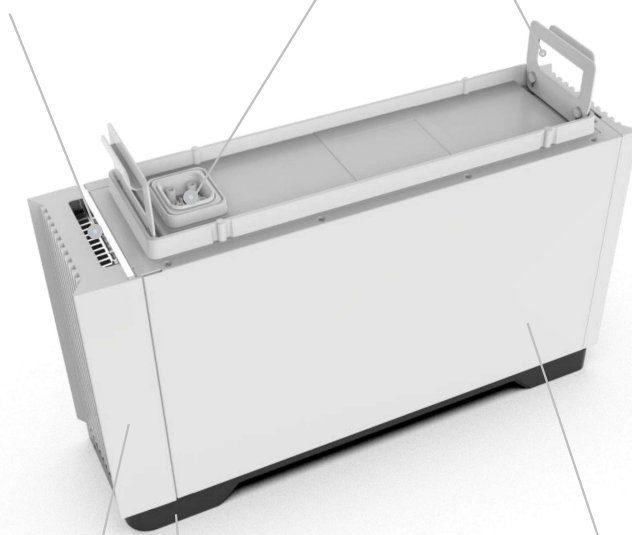

Energy Optimizer

Base


Battery module IP66



Easy to install:

Ergonomic handles with each system improve user comfort and ease of deployment, ensuring an easy and efficient setup process.

A 3-element tower can be installed in just 20 minutes

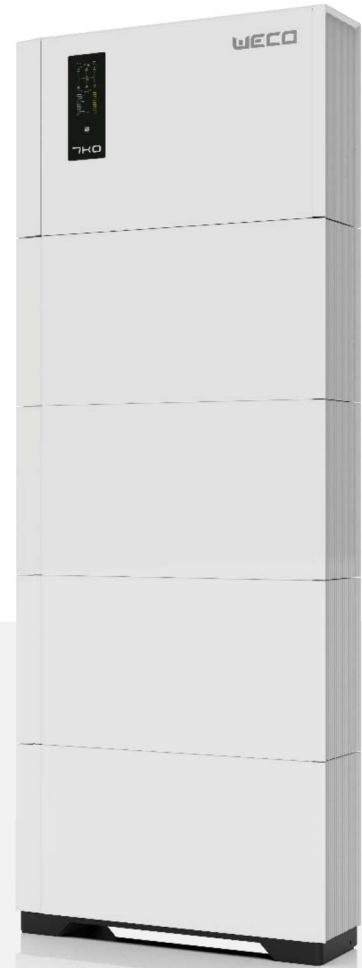

8K0 PRO

We recommend that you contact WeCo for the most up-to-date datasheet, read the warranty and manual before making any purchase decisions. No part of this document may be copied or reproduced without the written permission of WeCo. All data is subject to change without notice.

** Depending on the target market, the battery and handle design may vary in design and interlocking concept.



FEATURES

SAFETY

Integrated Fire Suppression System, Multi-Level Protection, 5-Level BMS Protection.

RELIABLE

LFP battery, IP66-rated design, built-in battery heating module.

QUICK INSTALLATION

Stackable modular design, adaptive plug & play self-configuration.

SCALABILITY


Scalable up to 12 modules
Up to 100% DoD Exploitable
Module-level energy optimization, capacity expansion at all times.

EXPANSIONS

No cycles and time limits for capacity expansion.

EASY TO USE

LCD display on both the app and on the web portal interface for easy access.

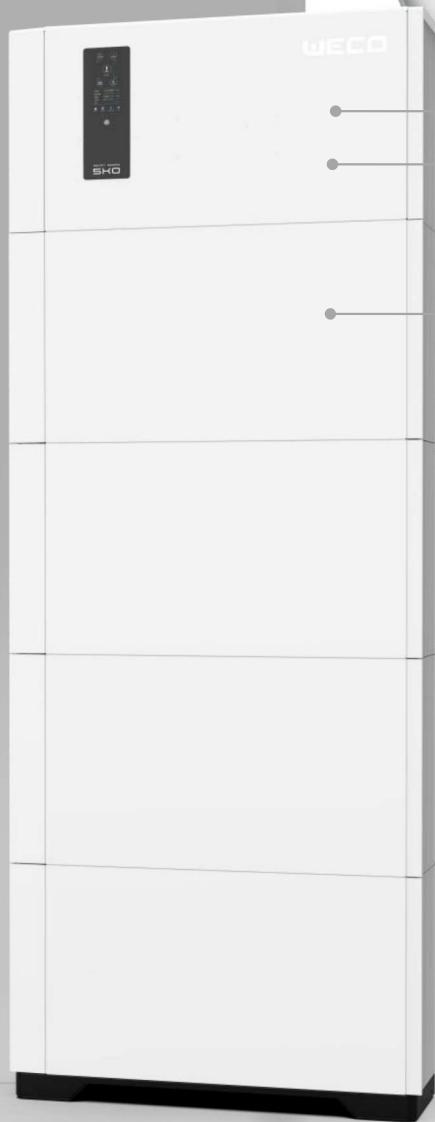


Rapporto DC AC fino al 200% PV*


Inverter All-In-One 3 ~ 6 kW

Modulo batteria
5.1 kWh / 450 VDC


5KO SMART SYSTEM



Inverter AC/DC



HV Slave Controller
(for parallel)



Battery module
5,1 / 8.0 kWh



AC EV
Charger

*Max. 10kW Solar Input

WECO



ENVIRONMENT
SMART-PLATFORM
Total Integration
with WeCo
devices

WECO

WeCo Srl a Socio Unico
Viale J. F. Kennedy 113-121
50038 Scarperia e San Piero
Firenze, Italy

weco@wecobatteries.com
www.wecobatteries.com



Le Images contained herein are for demonstration purposes only and may not reflect the prospects of the final product. Confirm current data with WeCo before purchasing.
Unauthorized use, copying, or reproduction of any design, logo, or content is prohibited. WeCo is a registered trademark of WeCo Srl Italia.